

FPC-12700 - STANDARD

HARDWARE FEATURES

Enclosure:

- IP54 weatherproof rating
- Polycarbonate
- Mounting brackets included

Protection:

- Low voltage control and input circuitry

Control & interface:

- Indicator lights for power on and valve open

Inputs:

- Digital 24Vac input for float switch

Outputs:


- 24Vac output for solenoid valve

Included with panel:

- 10 Amp 3 pin 1.5m power supply lead
- 25mm female/female 24Vac N/C solenoid valve
- 9006 float switch with 10m cable

FUNCTION FEATURES

- Ideal for maintaining water at predetermined levels in a tank, swimming pool or reservoir
- When tank full level is reached, the controller pulse closes the valve, ensuring no further water enters the tank, and if the water level drops to low level, the valve is opened
- Switching differential: Min 25mm, max 1m

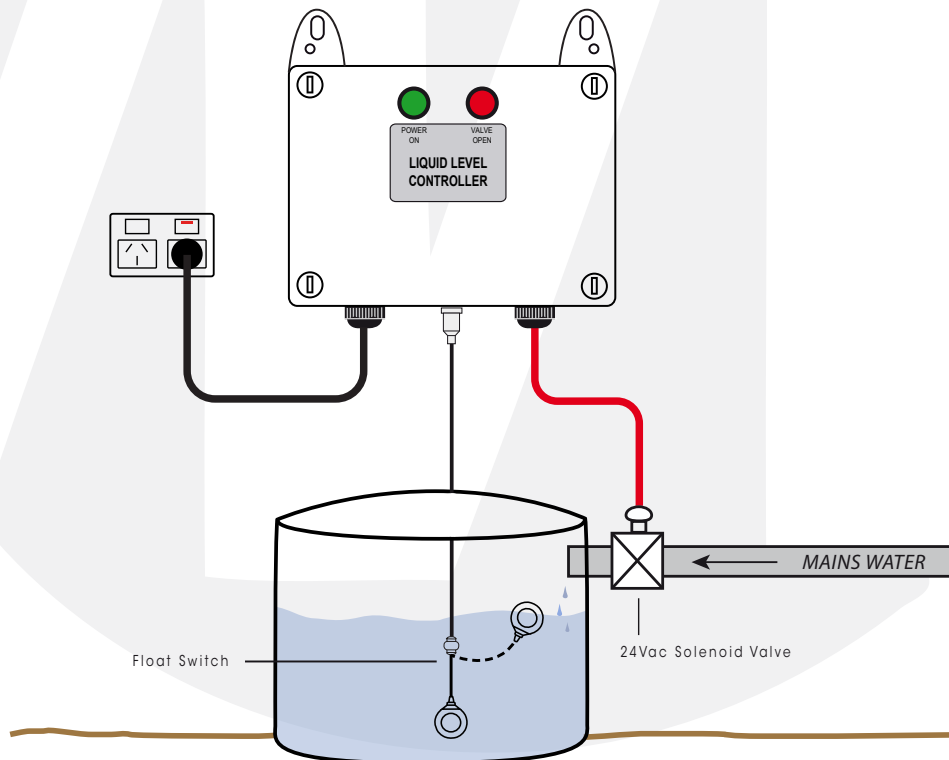

SINGLE PHASE (230VAC) - FPC-12700

Code	Description	Enclosure Size
FPC-12700	Tank Fill Controller - Valve Shut-Off - Standard	200x160x95mm